


DDLA-24-4 Asynchronous actuator control box

DRAWING
(mm)



PHOTO



MODEL NO. DESIGNATION

DDL A = (A) Asynchronous model - Input DC voltage - Number of actuator axis

Example: DDLA-24-1


ACTUATOR ADAPTER CABLE INCLUDED



GENERAL DATA

Product name	DDLA-24-4
Mode	Asynchronous
Number of actuators	4
Compatible hand control	HDL-DDLA-24-4
Compatible actuator	DLA-DLB (Standard version with flying wires leads. Adapter cable C-DDLA-D included)
Output voltage	24 VDC
Output current A	3
Overload protection current	N/A
Duty cycle	10%. max. 2 min. continuous operation in 20 min
Input voltage	24 VDC
Power cables	DC DIN 41529 1000 mm
CE Marking	EMC Directive 2014/30/EU
Ambient temperature deg. C	+5°C ~ +40°C
IP	IP42
Weight Kg	0.36
Connector to hand control	DIN 45326 eight-pin. 45°. 270° Jack
Connector to actuator	DIN 41524 four-pin. 72°. 216° Jack
Body material/s	ABS + Fireproof
Color	Black

DRAWING OF INCLUDED ACTUATOR ADAPTER CABLE
(mm)

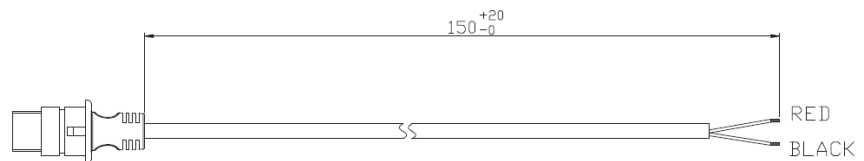

OPERATION GUIDANCE ASYNCHRONOUS CONTROL BOXES **CONNECTOR PIN LAYOUT**

- Connect the actuator/s adapter cable between the control box and the actuator
- Press and continuously hold down the correct button on the hand control for actuator/s operation
- The actuator/s will stop at any position when the hand control button is released
- The actuator/s will stop automatically by its internal limit switches at end position
- Simultaneous operation of several actuators is possible

